



High vacuum HALF-WAVE RECTIFIER
REDRESSEUR MONOPLAQUE à vide poussé
Hochvakuum EINWEGGLEICHRICHTER

Heating: direct by A.C.;
parallel supply
Chauffage: direct par C.A.;
alimentation en parallèle
Heizung: direkt durch Wechselstrom;
Parallelspeisung

$V_f = 4 \text{ V}$
 $I_f = 0.3 \text{ A}$

Dimensions in mm
Dimensions en mm
Abmessungen in mm



Operating conditions and limiting values
Caractéristiques d'utilisation et limites
Betriebs- und Grenzwerte

$V_{tr} = \text{max. } 850 \text{ V}_{\text{eff}}$

$I_o = \text{max. } 5 \text{ mA}$

$V_{inv} = \text{max. } 3500 \text{ V}$


$R_t = \text{min. } 0 \Omega$

$C = \text{max. } 0,5 \mu\text{F}$

1876

"Miniwatt"

I_a (mA)

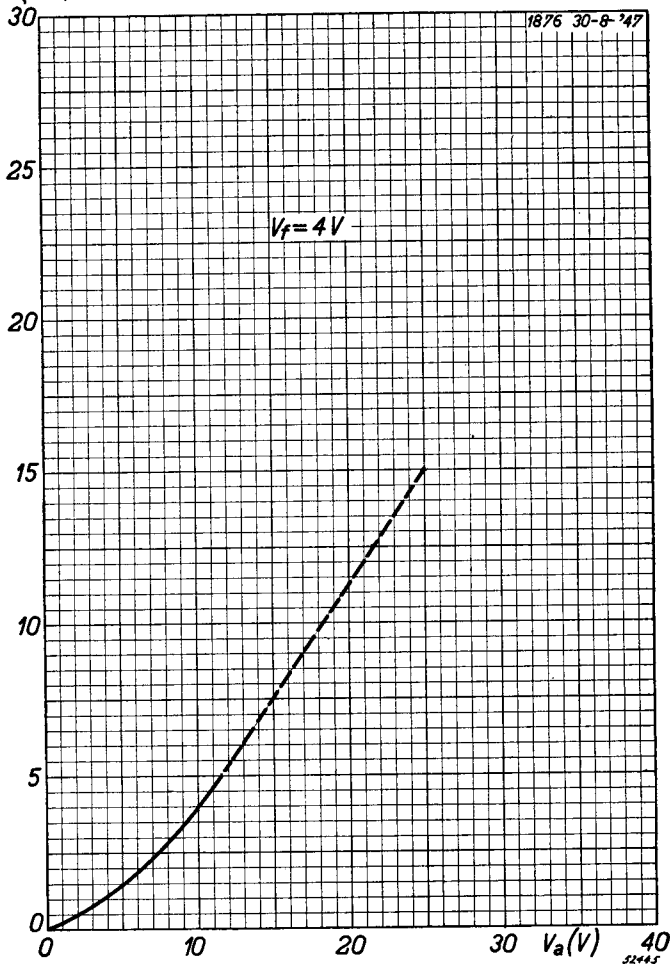

PHILIPS



*Electronic
Tube*

HANDBOOK

	1876	
page	sheet	date
1	1	1948.09.15
2	2	1948.09.15
3	FP	1999.09.11