

High vacuum HALF-WAVE RECTIFYING VALVE for high voltage
TUBE REDRESSEUR MONOPLAQUE à vide poussé pour haute tension
Hochvakuum EINWEGGLEICHTERRÖHRE für Hochspannung

Heating: indirect by A.C.


Chauffage: indirect par C.A.

Heizung: indirekt durch Wechselstrom

$$V_f = 4 \text{ V}$$

$$I_f = 0,7 \text{ A}$$

Dimensions in mm
Dimensions en mm
Abmessungen in mm



Base, culot, Fuss: Edison


Limiting values
Caractéristiques limites
Grenzdaten

$$V_{tr} = \text{max. } 10\,500 \text{ V}_{\text{eff}}$$

$$I_0 = \text{max. } 2 \text{ mA}$$

1878

"Miniwatt"

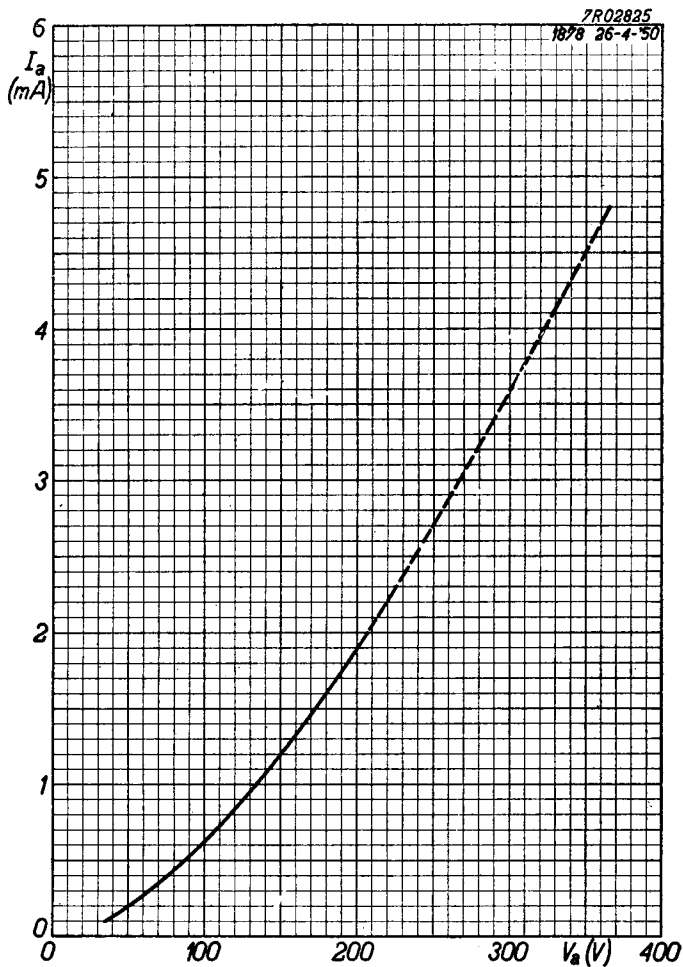

PHILIPS



*Electronic
Tube*

HANDBOOK

	1878	
page	sheet	date
1	1	1950.05.05
2	A	1950.05.05
3	FP	1999.09.11