

S.Q. TUBE

Special quality double triode designed for use as cascode amplifier, cathode follower etc. in R.F. and A.F. circuits.


QUICK REFERENCE DATA

Life test	10 000 hours		
Low interface resistance			
Mechanical quality	Shock and vibration resistant		
Base	Noval. Gold plated pins		
Heating	Indirect A.C. or D.C.; parallel supply		
Heater voltage	V_f	6.3	V
Heater current	I_f	335	mA
Anode current	I_a	15	mA
Mutual conductance	S	12.5	mA/V
Equivalent noise resistance	R_{eq}	250	Ω
Noise factor ($f = 200$ MHz)	F	4.6	dB
Hum voltage	V_g	max.	50 μV_{RMS}

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

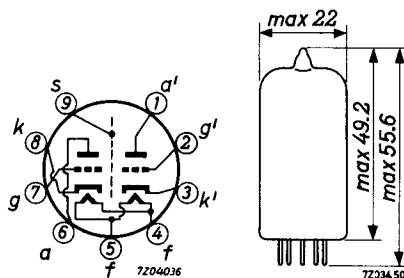

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	335	318 - 352		mA
Anode supply voltage	V_{ba}	100			V
Grid supply voltage	$+V_{bg}$	9			V
Cathode resistor	R_k	680			Ω
Anode current	I_a	15	14.2-15.8	min. 13.5	mA
Mutual conductance	S	12.5	10.5-14.5	min. 9	mA/V
Amplification factor	μ	33			
<u>Negative grid current</u>	$-I_g$		max. 0.1	max. 1.0	μA
<u>Equivalent noise resistance</u>	R_{eq}	250			Ω
Frequency $f = 45$ MHz					
<u>Noise factor in cascode circuit,</u> adapted to minimum noise	F	4.6			dB
Frequency $f = 200$ MHz					
<u>Input resistance</u>	r_g	3			k Ω
Frequency $f = 100$ MHz					
<u>Cut off voltage</u>	$-V_{g1}$	15			V
Anode voltage	V_a	150			V
Anode current	I_a		max. 5		mA
Anode supply voltage	V_{ba}	90			V
Cathode resistor	R_k	120			Ω
Anode current	I_a	12			mA
Mutual conductance	S	11.5			mA/V

CHARACTERISTICS (continued)

Leakage current between
cathode and heater

Voltage between cathode and
heater $V_{kf} = 60 \text{ V (k neg)}$
or $= 120 \text{ V (k pos)}$

Insulation resistance

	I	II	III	
I_{kf}		max. 6	max. 12	μA

CAPACITANCES. Both sections if not otherwise indicated.

		I	II	
Anode to cathode, heater and screen	$C_{a/kfs}$	1.75	1.55 - 1.95	pF
	$C_{a' / k' fs}$	1.65	1.45 - 1.85	pF
Anode to cathode and heater	$C_{a/kf}$	0.5	0.4 - 0.6	pF
	$C_{a' / k' f}$	0.4	0.3 - 0.5	pF
Grid to cathode, heater and screen	$C_{g/kfs}$	3.3	2.7 - 3.9	pF
Grid to cathode and heater	$C_{g/kf}$	3.3	2.7 - 3.9	pF
Anode to grid	C_{ag}	1.4	1.2 - 1.6	pF
Anode to cathode	C_{ak}	0.18	0.14 - 0.22	pF
Cathode to heater	C_{kf}	2.6		pF
	$C_{k' f}$	2.7		pF
Anode to screen	C_{as}	1.3	1.1 - 1.5	pF
Anode to grid, heater and screen	$C_{a/gfs}$	3.0	2.7 - 3.3	pF
	$C_{a' / gfs}$	2.9	2.6 - 3.2	pF
Cathode to grid, heater and screen	$C_{k/gfs}$	6.0	5.1 - 6.9	pF
Anode to anode other section	$C_{aa'}$	0.025	max.0.045	pF
Grid to grid other section	$C_{gg'}$		max.0.005	pF
Anode to grid other section	$C_{ag'}$		max.0.005	pF
Grid to anode other section	$C_{ga'}$		max.0.005	pF
Grid to cathode other section	$C_{gk'}$		max.0.005	pF
Cathode to grid other section	$C_{kg'}$		max.0.005	pF

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

LIFE

Production samples are tested to be within the end of life values (column III) under the following conditions during 10 000 hours.

Anode supply voltage	V_{ba}	100	V
Grid supply voltage	$+V_{bg}$	9	V
Cathode resistor	R_k	680	Ω
Grid resistor	R_g	47	$k\Omega$
Cathode to heater voltage (k neg)	V_{kf}	60	V

LIMITING VALUES (Absolute max. rating system)

Anode voltage	V_{aO}	max.	550	V
	V_a	max.	250	V

LIMITING VALUES (continued)

Heater voltage: The average heater voltage should be 6.3 V.

Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

The tolerance of heater current (column II) should be taken into account.

OPERATING CHARACTERISTICSAdditive mixer

Anode supply voltage	V_{ba}	60	90	150	V
Anode resistor	R_a	0	1	3.9	k Ω
Grid resistor	R_g	1	1	1	M Ω
Grid oscillator voltage	V_{osc}	2	2.5	3	V_{RMS}
Anode current	I_a	4.7	7.7	11	mA
Conversion conductance	S_c	2.9	3.5	4.1	mA/V
Internal resistance	R_i	8.3	7	6.1	k Ω

Output tube class A

Anode voltage	V_a		220		V
Load resistance	$R_{a\sim}$		20		k Ω
Negative grid voltage	$-V_g$		6.5		V
Input voltage	V_i	0	1.5	4.5	V_{RMS}
Anode current	I_a	6.5	-	9.2	mA
Output power	W_o	-	0.05	0.5	W
Total distortion	d_{tot}			7	%

Output tube class B (two units). Constant sinusoidal input voltage (single tone).


Anode voltage	V_a		200		V
Load resistance	$R_{aa\sim}$		22		k Ω
Negative grid voltage	$-V_g$		6		V
Input voltage	V_i	0	0.9	4.0	V_{RMS}
Anode current	I_a	2x5	-	2x9	mA
Output power	W_o	-	0.05	1.2	W
Total distortion	d_{tot}	-	-	3	%

OPERATING CHARACTERISTICS (continued)


Output tube class B (two units). Speech and music input voltage



Anode voltage	V_a	200	V
Load resistance	$R_{aa\sim}$	10	$k\Omega$
Negative grid voltage	$-V_g$	6	V

7Z01415 5ahh33


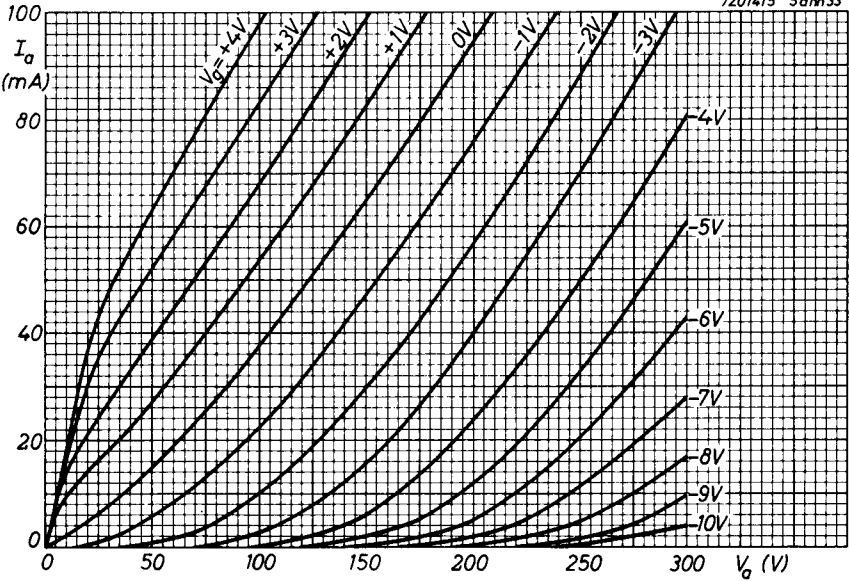


7Z01417 5ahh33

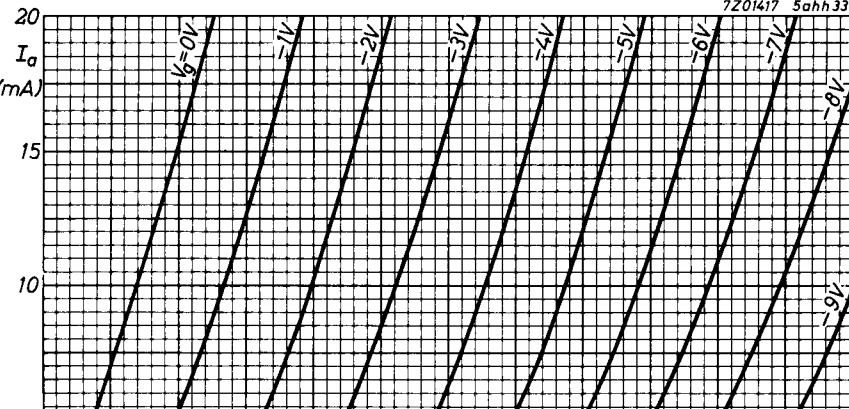

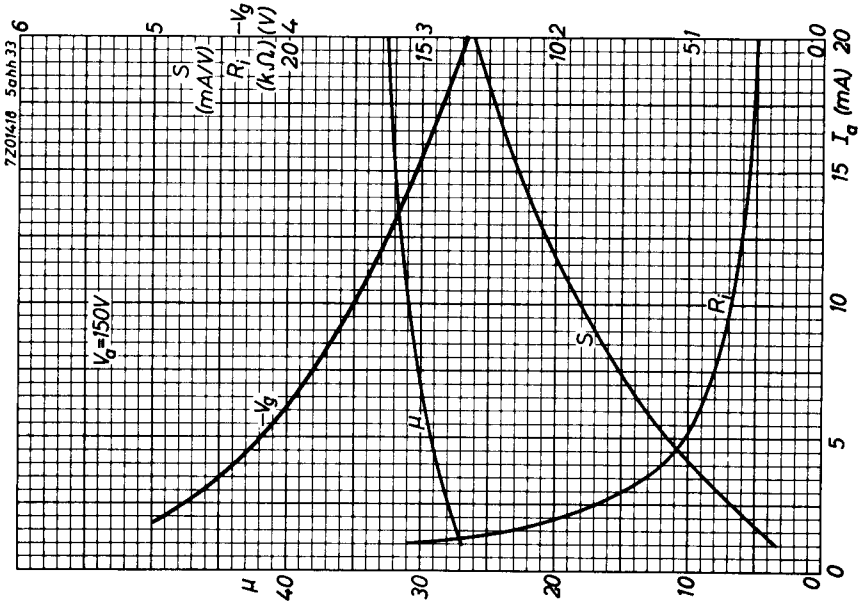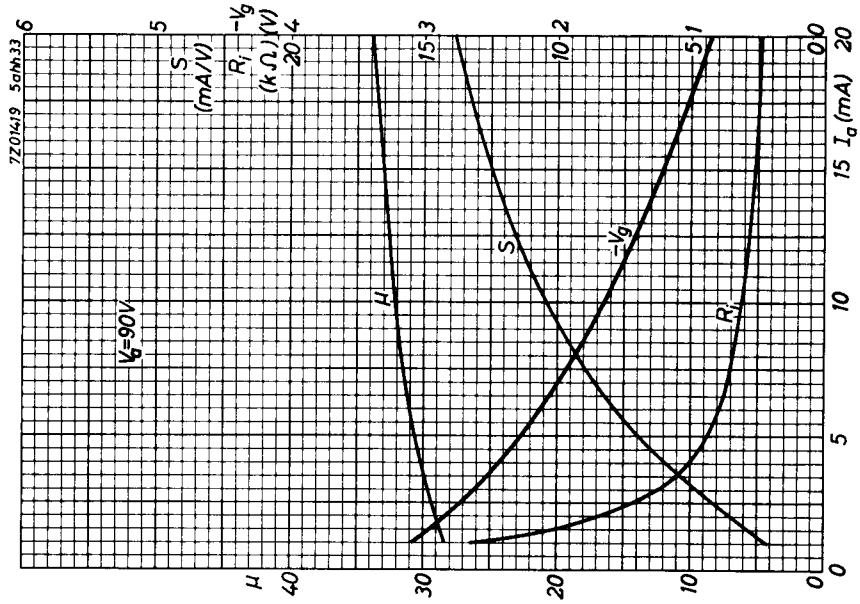

7704035-5, nh. 3.3.

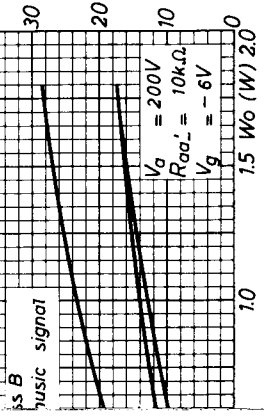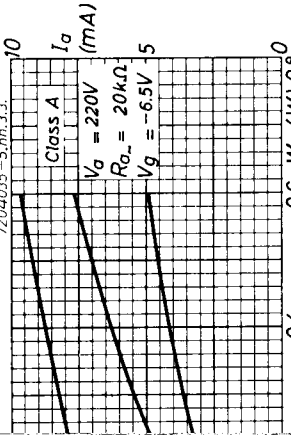

PHILIPS

Data handbook



**Electronic
components
and materials**

E188CC

page	sheet	date
1	1	1968.12
2	2	1968.12
3	3	1968.12
4	4	1968.12
5	5	1968.12
6	6	1968.12
7	7	1968.12
8	8	1968.12
9	9	1968.12
10	10	1968.12
11	FP	2000.12.04